

The Use of BJ's Vectra MFL Tool Technology in the Assessment of Pipeline Integrity Programs

By: Eng. Jeff Sutherland – BJ Non Destructive Test Research, **Rafael G. Mora** BJ Project Leader and Analyst

PIPELINE INTEGRITY ARGENTINEAN CONGRESS 2000

November 13th and 14th in Buenos Aires

Abstract

In Magnetic Flux Leakage (MFL) inspection technology, corrosion anomalies are detected and identified via their leakage field due to changes in wall thickness. With the increasing demand for higher accuracy and reliability in metal loss corrosion sizing, we present some of the distinctive advances made in the MFL pipeline in-line inspection industry. Designed and built with state of the art technology, a novel family of high-resolution MFL pipeline inspection tools is the first to successfully incorporate these advances into proven operational tools. We explain the technological advances of inertial mapping, circumferential sensor measurements, neural networks for metal loss sizing, and gas-bypass speed control. Experiences from recent projects are discussed. The quality of the information provided definitely is of great assistance in selecting the best practices within a pipeline integrity program.

Introduction

Today pipeline operators have many options when choosing an internal inspection technology to investigate the structural integrity of a pipeline. Two ILI techniques are available for wall thickness measurement, namely magnetic flux leakage (MFL) and ultrasonic (UT). UT pigs require an homogeneous liquid in the pipeline to allow the traveling of the acoustic signal from the sensor to the pipewall and back, additionally they require a very "clean" pipeline and product, thus, UT tools are generally excluded from the program when it comes to inspecting gas pipelines. On the other hand, the MFL method involves inducing a magnetic field into the pipe wall and sensing leakage of the field inside the pipe as the wall thickness changes. The magnetic flux leakage technique is the most commonly used technique to inspect large diameter gas transmission lines [1,2].

For gas transmission pipelines, the fact that the medium in which the inspection pig must travel is compressible presents added challenges in maintaining velocity control in order to collect good quality data. Additionally the product flow rate of a gas transmission pipeline must typically be reduced during an inspection run. For transmission lines operating at or near capacity the economic impact of reduced throughput can be greater than the cost of the inspection survey itself. Incorporating gas by pass and on-line speed control into an MFL pig improves data quality and reduces throughput reduction costs.

The term "high resolution" has become somewhat confused with "high accuracy". The two may imply the same thing but in fact are different. The term high resolution implies increasing the number of sensors and/or increasing the sampling rate. Such changes involve acquiring more data. It says nothing about the quality or accuracy of the data collected. Accuracy includes the amount of uncertainty in a measurement and therefore reflects a system characteristic since it is determined by factors beyond acquisition resolution [3].

The goal of incorporating advances in technology into a new inspection pig should be to provide better more reliable information not just more information. Improvements in the miniaturization and speed of electronic and computer components have facilitated the incorporation of many more sensors into the latest inspection tools.

The following technological advances have been incorporated into the design and operation of the advanced inspection tool shown in Figure 1. These advances have led to significant improvements in quality and accuracy of data and reliability of tool performance.

- New design, modeling and conceptualization tools

- 3 Component magnetic flux vector sensor head with integrated Eddy Current ID/OD discriminator.
- Digital signal processing horsepower.
- Neural Network data analysis
- Gas Bypass with speed control
- Strapdown inertial navigation system (INS)
- Modern software and information technology systems

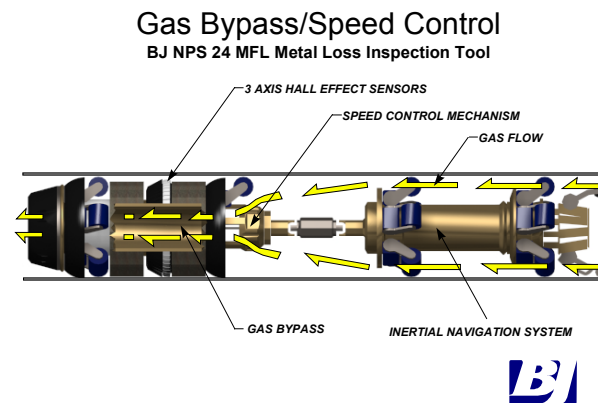


Figure 1. The Vectra MFL In-line Inspection Tool

The Basics

Magnets produce magnetic fields that exert a force of attraction on ferromagnetic materials. Lines of flux can represent the strength and direction of the magnetic field. Magnetic flux tends to travel through steel rather than air or gas since it is a ferromagnetic material. Magnetic saturation occurs when the amount of flux through an area starts to limit itself or saturate. Once the steel becomes saturated some of the flux actually starts to significantly leak out of the material. The magnetization system is the foundation upon which magnetic flux leakage measurement is built. Accurate determination and interpretation of the length, width and depth of the defects relies upon a field that is not only strong but uniform and consistent.

For pipeline inspection tools, a magnetic circuit is constructed with magnets, flexible steel brushes to couple the magnetic flux into pipe wall and a "backing bar". This magnetic assembly is represented in Figure 2. Flux leakage is measured by placing sensors adjacent to the pipe wall within the magnetic circuit. These magnetic assemblies are repeated completely around an inspection vehicle to provide

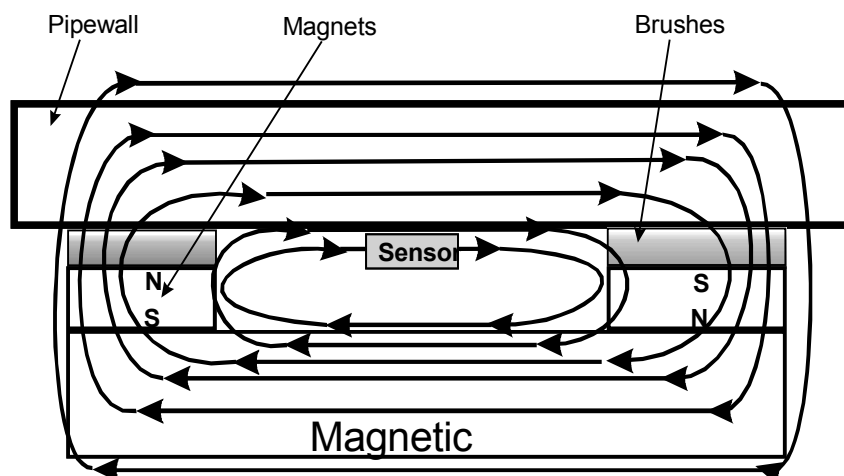


Figure 2. MFL Pipeline Inspection Magnetic Circuit

full circumferential coverage. Stronger magnets can help minimize the effects of changes in wall thicknesses, stress and velocity since they produce strong leakage fields [4]. The Eddy Current sensor was incorporated into the sensor head design of the tool in order to interpret and correlate its ID/OD signals with the magnetic measurements. Elimination of a secondary sensor ring also affords a more robust mechanical tool design.

Advances in electronics, software, digital signal processing (DSP) and data storage technologies allow massive amounts of data to be collected and stored within a self-contained pipeline inspection vehicle. As these technological advances improve metal loss detection and sizing accuracy, other inspection variables that could affect sizing accuracy should also be examined in order to make appreciable improvements [4].

Circumferential Sensors

The magnetic field (H) and the flux density (B) pictured above exist as vector quantities (Figure 4). In order to precisely measure the flux leakage, not only the magnitude of leakage must be measured but the direction of leakage must be considered as well.

Hall Effect sensors collect flux data in each of the axial, radial and circumferential directions allowing for measurement of the absolute flux leakage field vector. BJ was the first to utilize the circumferential sensor technology and is the only inspection vendor using it in field operations.

Incorporating the circumferential sensor provides much needed information for improving defect

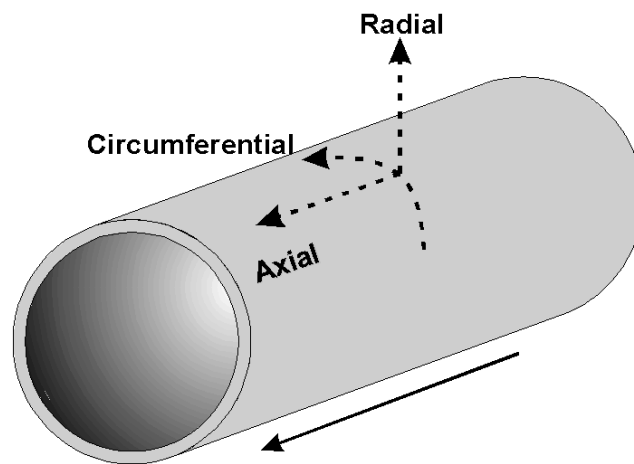


Figure 3. Magnetic Flux Components as referenced for a pipeline.

length and width accuracy. More accurate length and width measurements improve defect depth estimation. Since MFL tools use an axially oriented magnetic field it is extremely difficult to detect axially oriented pipe wall defects such as long narrow axial corrosion (LNAC or NAEC) and cracks using just the axial and radial sensors. The circumferential sensor provides data that greatly enhances the probability of detecting such defects [5]. Because of the critical length dependence in most defect assessment criteria (eg. B31G, NG-18, RSTRENG [9,10]), obtaining correct length and depth values is crucial.

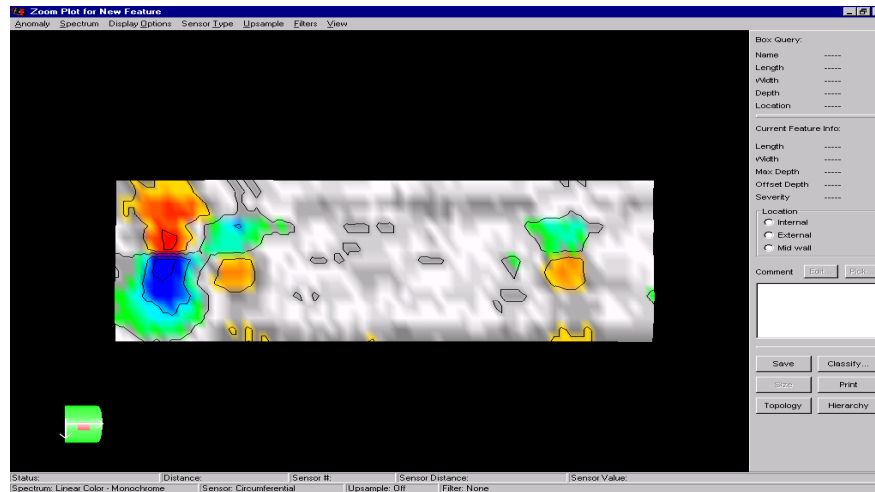
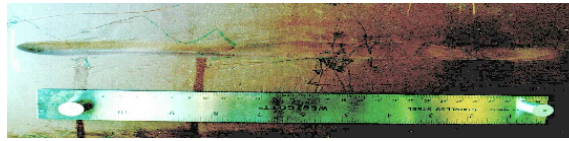


Figure 4 Use of the circumferential sensor to distinguish a long, narrow corrosion defect

Data Analysis and Interpretation

Once defect signals have been collected they must finally be interpreted. It is at this analysis and interpretation stage where the most significant difficulties can arise. Resolution of the data collected is a factor in the final analysis but as stated previously high resolution should be considered in terms of better accuracy. And with the detailed information that a high-resolution tool provides, more detailed severity criteria can be used with greater confidence. Of course more sophisticated analysis and interpretation techniques must be used to process and manage the large amounts of data as well. A combination of many analysis methods is the most reliable and accurate choice of, in which artificial intelligence is taking a significant role [6].

The most widespread use of artificial intelligence is neural network computational techniques. Neural networks attempt to mimic the human brain's past experience decision making process. The interaction of nodes in a neural network is analogous to the interactions of neurons in the brain as shown in Figure 5. These neural networks can be useful in pattern qualification and quantification where there are too many variables for effective traditional analysis or if the pattern is vague and not clearly defined [7].

The accuracy of defect sizing obtained allow for confident calculations of failure pressures. Hence prioritization of defects can be done based on their predicted threat to the integrity of the pipeline. Having accurate data leads to fewer digs and repairs and higher overall confidence in the integrity plan. However, field verification and assessment of any defect should be performed for any engineering or repair decision. Traditionally, the verification of defect assessment has become the determining task of the success of any project. It promotes that the quality and reliability of the inspection information and company.

Results from verification digs from a recent gas pipeline inspection project in South America are shown in Figure 6.

Other recent results have been published from an extensive evaluation of a recent oil pipeline inspection where the Vectra depth sizing accuracy was found to be reliably better than 6% WT [8]. But to do a true comparison, defects should be assessed and considered for more than just peak depth.

To do more advanced integrity and pressure based assessments like RSTRENG [9,10], detailed depth profile information along the entire length of the defect or group of defects in question should be compared (as illustrated in Figure 7). From such comparisons, the operator can then assess the

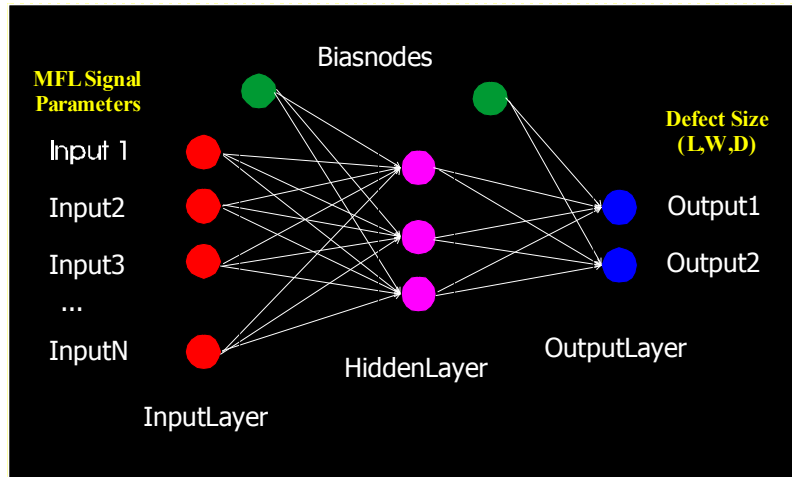


Figure 5. Schematic layout of a Neural Network

accuracy of predicted failure pressures from the inspection as well [8]


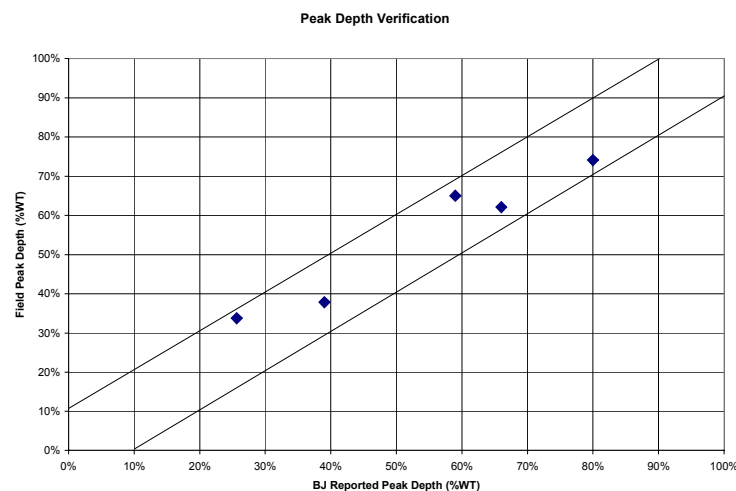


Figure 6. Field comparison/verification for peak depth prediction accuracy of clustered defects from a recent gas pipeline inspection. There are over 100 individual defects represented here so more than just depth accuracy can be assessed.



Figure 7. (a) Vectra prediction of defect layout and depth (as displayed with the VectraView software)

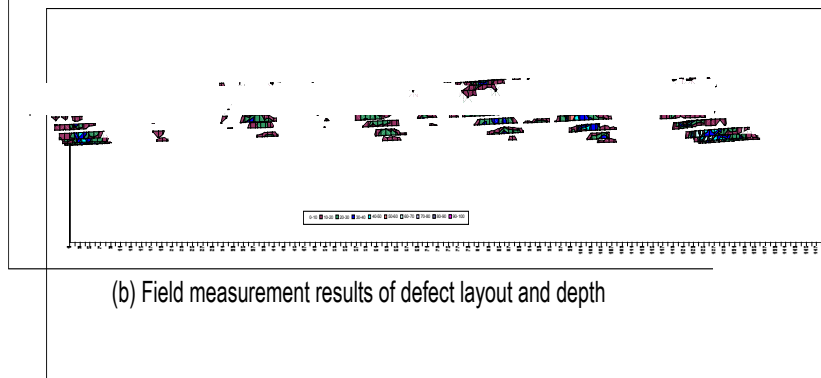

(b) Field measurement results of defect layout and depth

Gas Bypass & Speed Control

Velocity variations associated with pigging in gas pipelines affect the flux leakage signal because it is distorted under high speed conditions resulting in unusable MFL data and incomplete coverage of the pipeline. The Vectra magnetic flux leakage inspection tool incorporates a dynamic gas bypass and speed control system into its design. [19] (Figure 1). Gas bypass decouples the pig speed from the pipeline gas flow. The velocity of the pig is then controlled by a valve or throttle control mechanism. A hole through the center of the tool's cupped front magnetizer module forces the gas flow away from the sensor heads and arms, resulting in better quality of data collected. The velocity plots from a recent 24" gas line inspection is shown in Figure 8, where the tool maintained itself well within its operating speed range while the line speed at 5.7 m/s did not need to be altered to accommodate the ILI tool. By maintaining a more constant speed during an inspection the flux leakage field has less variability, which in turn improves defect characterization.

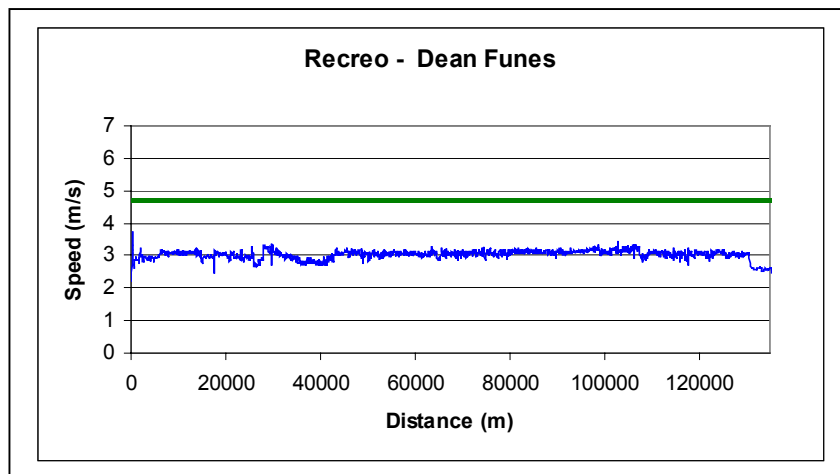


Figure 8. Velocity plot from a recent 24" inspection.
The tool speed was 3 m/s and well under the average gas speed of 5.7 m/s

Another design consideration in speed control is the incorporation of a backup fail safe or override mechanism should the throttle control fail open thereby preventing the tool from moving in the pipeline. The BJ gas bypass/speed control pig incorporates an autonomous bypass override system (B.O.S.). This system consists of a flapper valve operating via independent power source and control electronics. The valve actuates in a positive close manner and is time based.

Today's new gas transmission pipelines are operating at higher and higher pressures while demands are also being placed on existing lines to maintain maximum allowable operating pressure (MAOP). During an MFL inspection the gas throughput of the line typically must be reduced substantially with conventional ILI tools in order to accommodate data acquisition speeds (1 - 4 m/s). If a transmission line is operating at maximum throughput there is an additional cost of "loss revenue" from the "lost product" associated with the reduced throughput during inspection.

As the demand for gas grows, more and more large gas transmission pipelines may be required to operate at capacity year round. Inspecting such pipelines may only be economically feasible with gas bypass capable inspection pigs. Another example is that of a NPS 36 pipeline at 1000 psi and running at 9.5 m/s. Using the bypass technology, the inspection tool ran at 3 m/s while allowing the full gas throughput at 9.5 m/s. The difference in gas delivered over that time compared to reducing the gas speed to 3 m/s and running a conventional tool was 28 million cubic meters, which was worth \$1,000,000 in revenue to the pipeline company [12]. That product delivery revenue significantly overshadowed the cost of running the inspection tool, making it a "profitable" inspection project over a conventional tool inspection.

Defect Location Using Inertial Navigation and GPS

Once a severe or critical defect has been characterized it must be located in the field. The BJ MFL tool incorporates a strap-down inertial navigation system (INS) to determine position and attitude of the pig along its trajectory within the pipe. Three axis gyros and accelerometers combined with odometer information are used to determine three-dimensional changes in the pig's position on earth as it travels through the pipeline. Such a system has been well proven via the GeopigTM [13-17].

Establishing Global Positioning System (GPS) control points along the pipeline and then “tying” the inertial data collected by the tool to these points calculate actual geographic coordinates. By transforming the pig’s trajectory into the tie points, accurate "real world" GPS co-ordinates are obtained for any point along the pipe [18].

From knowing all points along the pipeline, we can generate a "virtual pipeline", created from the processed inertial data directly. All pipeline features are given a co-ordinate and ancillary information such as bends and the welds in the pipeline are all identified and provided which aids in location in the field (Figure 9).

The sensitivity of the inertial devices provides information regarding dents and other physical anomalies that affect the tool's motion the pipeline. Inertial deflection information can then be used to correlate the location of dents with specific metal loss regions that are often the result of third party damage.

Since the final processed inertial data (plan and profile) is in geographic co-ordinate form all the data collected by the MFL tool can be readily be presented and incorporated into a Geographic Information System (GIS) or an automated mapping/facilities management (AM/FM) system.


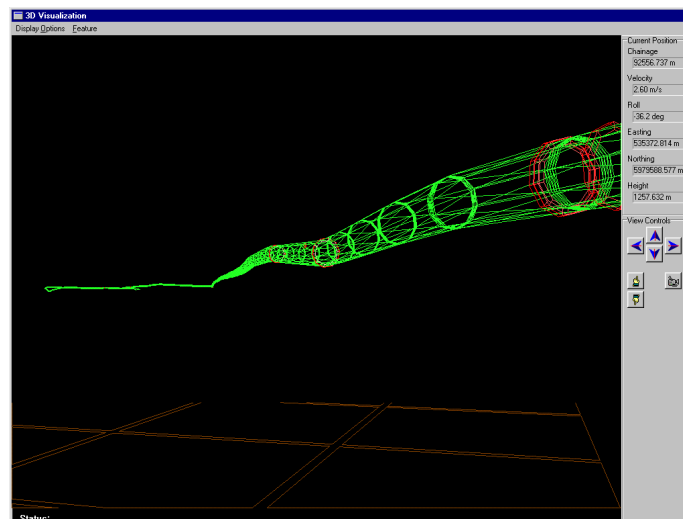


Figure 9. (a) The "Virtual Pipeline" generated from inertial data

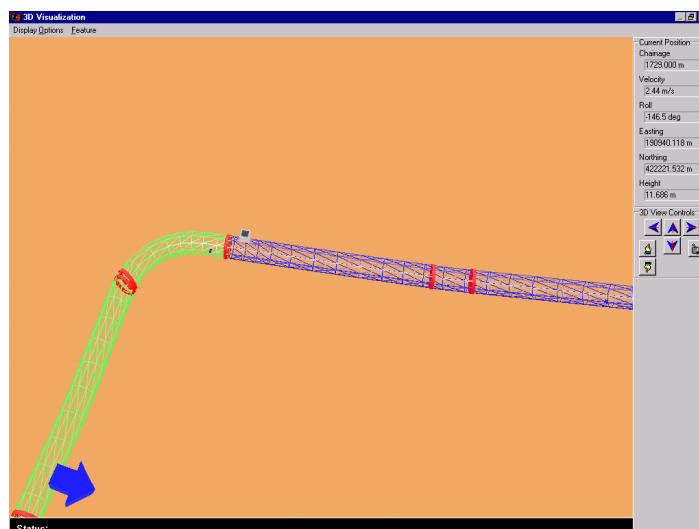

(b) "Virtual Pipeline" showing a 3D bend, a marker box location (grey box just before the bend) and a heavy wall section (purple). The blue arrow indicates

Data Presentation

In today's digital world it's impractical to attempt to manage a pipeline integrity program without some formal information technology especially with the amounts of data that ILI tools can provide. This can be as simple as a desktop spreadsheet/database to a company wide integrated GIS system.

In either case, one of the time-consuming and critical issues is getting the new data into the system. Although provided with each inspection, paper copies of the report are usually only good as a reference. The useful data comes in a digital "softcopy" form such as in a spreadsheet or even a pre-determined formatted file agreed to by the pipeline company and the inspection company. Figure 10 demonstrates some options from recent examples of preferred reporting formats for pipeline operators. With the flexibility of commercially available databases, data can be reported in many different ways. The biggest benefit comes from the flexibility to sort and filter information on demand according to different criteria, eg., all defects > 20%WT between 100 and 2000 meters (odometer) in order of decreasing predicted failure pressure. Hence prioritization of the worst defects has already been done. Understanding the way that a pipeline company prefers the data format has resulted in less time taken in manipulating and reformatting data for input into an integrity database and less confusion and potential mistakes from what data means. This allows more time to be spent reviewing and prioritizing for upcoming maintenance planning and scheduling.

RSTRENGTH	Defect	RPR	Cmax	Chainage	Method	IntExt	UpGWDNm	Abbreviation	DistTot	ClockPosition	CLength	CWidth
0.857	0.4	2008	142	ME310	EXTERNAL	1827	CLS	4.51	10.02521352	0.1610000000	0.278989693	
0.851	0.857	0.389	2363	849	ME310	EXTERNAL	2109	CLS	9.678	9.484798698	0.3880000000	0.1139649334
0.836	0.857	0.333	2369	709	ME310	EXTERNAL	2137	CLS	7.802	8.091572545	0.553	0.1529712869
0.838	0.888	0.329	2366	112	ME310	EXTERNAL	2157	CLS	8.356	2.352180387	0.4470000000	0.1481954126
0.874	0.86	0.391	2009	009	ME310	EXTERNAL	1827	CLS	5.377	9.969840269	0.368	0.2507886535
0.999	0.903	0.346	2349	825	ME310	EXTERNAL	2109	CLS	5.922	10.07599998	0.3430000000	0.2621085469
0.999	0.956	0.290	2335	8	ME310	EXTERNAL	2107	CLS	6.078	10.705791995	0.536	0.1139649334
1.001	0.905	0.409	2340	846	ME310	EXTERNAL	2124	CLS	4.21	1.327987921	0.211	0.2393893602
1.017	0.970	0.327	2372	599	ME310	EXTERNAL	2150	CLS	9.1550	10.167391525	0.1980000000	0.3686822670
1.022	0.974	0.291	2354	562	ME310	EXTERNAL	2123	CLS	9.2830	3.8845263536	0.2420000000	0.1367959201
1.044	0.994	0.342	2341	504	ME310	EXTERNAL	2124	CLS	4.7880	0.896651957	0.1520000000	0.2507886535
1.046	0.997	0.263	2346	396	ME310	EXTERNAL	2108	CLS	4.4390	2.504878542	0.26	0.1367959201
1.051	0.990	0.285	1225	234	ME310	EXTERNAL	1095	CLS	5.795	9.6759995494	0.2120000000	0.3419848003
1.072	0.823	0.344	2348	12	ME310	INTERNAL	2130	CLS	0.036	10.87216720	2.869	0.2633842636
1.082	0.928	0.236	2348	177	ME310	EXTERNAL	2130	CLS	0.151	0.9744070165	2.869	0.6015777071
1.1	0.944	0.404	2245	188	ME310	EXTERNAL	2029	CLS	9.7740	5.8460310932	0.1660000000	0.1139649334
999	0.997	0.233	12114	494	ME310	EXTERNAL	1078	GCR	7.883	7.6389719648	0.3031999989	0.3077349564

Figure 10 (a) Example of prioritisation report based on predicted failure pressure and depth.

Defect	RPR	Cmax	Chainage	Method	IntExt	UpGWDNm	Abbreviation	DistTot	ClockPosition	CLength	CWidth
WELD	10	2.357	2.531	7.137	358527.4						
WELD	10	3.630	8.820	7.137	358527.4						
WELD	20	4.888	9.820	7.137	358527.4						
WELD	20	10.516	11.680	7.137	358527.4						
WELD	30	13.708	11.680	7.137	358527.4						
ASL	1	460	459	30	7.14	13.708	11.680	17.201			
3.493	07:27	0.026	0.008	30	9816.381	0.646	11.680	19.572			
PCR	1	973	972	30	7.14	13.708	11.680	19.572			
5.864	05:55	0.022	0.021	16	9946.726	0.637	11.680	19.788			
PCR	2	244	243	30	7.14	13.708	11.680	19.788			
6.080	05:12	0.021	0.013	27	9900.191	0.640	11.680	19.988			
PCR	3	238	237	30	7.14	13.708	11.680	19.988			
6.280	05:21	0.026	0.027	18	9910.736	0.639	11.680	19.988			
WELD	30	20.173	1.895	7.137	358527.4						
PCR	1	276	275	30	7.14	20.173	1.895	20.466			
0.293	05:43	0.043	0.060	9	9901.124	0.640	11.680	20.598			
PCR	4	1	0	30	7.14	20.173	1.895	20.598			
0.425	05:04	0.032	0.029	14	9905.927	0.640	11.680	20.682			
PCR	5	1	0	30	7.14	20.173	1.895	20.682			
0.509	05:21	0.028	0.028	38	9702.969	0.653	11.680	20.797			
GCR	2	235	234	30	7.14	20.173	1.895	20.797			
0.624	05:26	0.056	0.039	14	9737.115	0.651	11.680	21.000			
PCR	6	236	235	30	7.14	20.173	1.895	21.000			
0.827	05:21	0.032	0.024	19	9863.380	0.643	11.680	21.740			
PCR	7	240	239	30	7.14	20.173	1.895	21.740			
1.567	06:16	0.024	0.021	24	9883.088	0.641	11.680	21.779			
GCR	3	239	238	30	7.14	20.173	1.895	21.779			
1.606	05:09	0.061	0.033	14	9706.128	0.653	11.680	22.061			
GCR	4	972	971	30	7.14	20.173	1.895	22.061			
1.888	05:10	0.037	0.035	22	9776.912	0.648	11.680	22.640			
PCR	8	241	240	30	7.14	20.173	1.895	22.640			

Figure 10. (b) Example of formatted file for input to pipeline operator's integrity database. [19]

Conclusions

The goal of the inspection vendor should be to provide as accurate information as possible regarding the metal loss condition of a pipeline so that the pipeline operator can make the best decisions with respect to integrity assessment. The accuracy of magnetic flux leakage as a technique to detect and size metal loss defects in gas pipelines will continue to improve as the latest technological advancements are incorporated into both the ILI tools and the interpretation of the data collected. Ongoing improvements in electronics, computing power, software and data analysis techniques should readily facilitate this.

Gas transmission pipelines previously not inspected due to reduced gas throughput considerations now have the option of running gas bypass MFL inspection pigs. Many pipeline operators can now benefit from flexibility in scheduling of ILI runs while greatly reducing or eliminating gas throughput costs. Onboard pig speed control will also provide more reliable MFL data and reduce the chances of reruns caused by speed excursions.

MFL data provided with inertial navigation data will allow ease of incorporation into a pipeline GIS. The MFL data can then be accurately cross-referenced to other pipeline information at that location, thereby, providing more complete pipeline integrity information.

Information technology has advanced and can be readily utilized for easier pipeline data reporting and management.

Other novel solutions to ongoing gas transmission inspection and integrity problems should be sought via the application of the latest technologies as they emerge.

References

1. Crouch A. E., "In-Line Inspection of Natural Gas Pipelines," Gas Research Institute Topical Report GRI -91/0365, May 1993.
2. G. J. Posakony and V. L. Hill, "Assuring the Integrity of Natural Gas Transmission Pipelines," Gas Research Institute Topical Report GRI-91/0366, 1992.
3. M. Siebert, "Differences Between Low Resolution and High Resolution Pigs", Newsco Pipeline Services, 1995.
4. T. A. Bubenik, J.B. Nestleroth, R.J. Eiber and B.F. Saffell, "Magnetic Flux Leakage (MFL) Technology for Natural Gas Pipeline Inspection," Gas Research Institute Topical Report GRI-91/0367, November 1992.
5. J. Sutherland, M. Siebert, "Application of the Circumferential Component of Magnetic Flux Leakage Measurement for In-Line Inspection of Pipelines", NACE Corrosion Expo 99, San Antonio Tx, USA, April 1999.
6. J. Sutherland, M. Siebert, "Development and Operational use of Artificial Intelligence in In-line MFL Pipeline Inspection", Review of Progress in QNDE, Vol 18. (eds) D.O. Thompson, D.E. Chimenti, (Plenum Press, NY, 1998).
7. C.H. Chen, "IEEE Fuzzy Logic and Neural Network Handbook ", McGraw-Hill, Inc., 1996.
8. T. Morrison, A Bhatia, N.S. Mangat, G Desjardins, "Validation of an In-Line Inspection Metal Loss Tool", ASME paper IPC00-0050, Proceedings of IPC , International Pipeline Conference 2000, Calgary, Alberta, Canada, October 2000
9. ASME B31 Code for Pressure Pipeline, Section 4 (B31.4) "Liquid Petroleum Transportation Pipelines", and Section 8 (B31.8) " Gas Transmission and Distribution Piping Systems", 1995
10. J.F. Kiefner, P.H. Vieth, "A Modified Criterion for Evaluating the Remaining Strength of Corroded Pipe", American Gas Association Catalog No. L51609, Dec 1989.
11. B. Long, M Siebert, J Sutherland, R. Wade and T. Sawyer, "Field Trial Experiences with a State of the Art Magnetic Flux Leakage Pig", Pipeline Week and Exhibition, Houston Tx, USA, Sept. 1997.
12. J. Sutherland, S. Clouston. "Advances in Magnetic Flux Leakage Measurement and Inspection for Metal Loss in Pipelines", 3rd International Conference on Pipeline Rehabilitation and Maintenance, Abu Dhabi, UAE, May 1999.
13. G. Cataford and D. Joerissen, "Pipeline mapping using an inertial inspection tool," First National Oil & Gas Technical Conference, Calgary, March 1995.

14. J. A. Czyz and J. R. Adams, 1994. Computation of pipeline bending strains based on Geopig measurements. Pipeline Pigging and Integrity Monitoring Conference, Houston, February 1994.
15. J. A. Czyz, C. Fraccaroli, A. P. Sergeant, "Measuring Pipeline Movement in Geotechnically Unstable Areas Using An Inertial Geometry Pipeline Inspection Pig," ASME International Pipeline Conference, Calgary, June 1996.
16. M. Cox, A. Garrigus, W. Walker and R. Wade, "Pipeline monitoring and remedial action from inertial geometry surveys in buried pipelines". The Pipeline Pigging Conference, Houston, Texas. February 1995.
17. H. A. Anderson, C. T. McDougall and J. R. Adams, "Pipeline evaluation using the geometry pipeline internal gauge ('Geopig')," Pipeline Pigging and Integrity Monitoring Conference, Houston, February 1993.
18. R. L. Wade and J. R. Adams, "An Integrated Approach For Pipeline Fitness For Purpose Determination Using Corrosion and Geometry Pipeline Pig Inspection Systems," Pipetech, Pattaya, September 1995.
19. Morrison Scientific Inc. Format for Corrosion Data Ver 1.1 June 1997.